
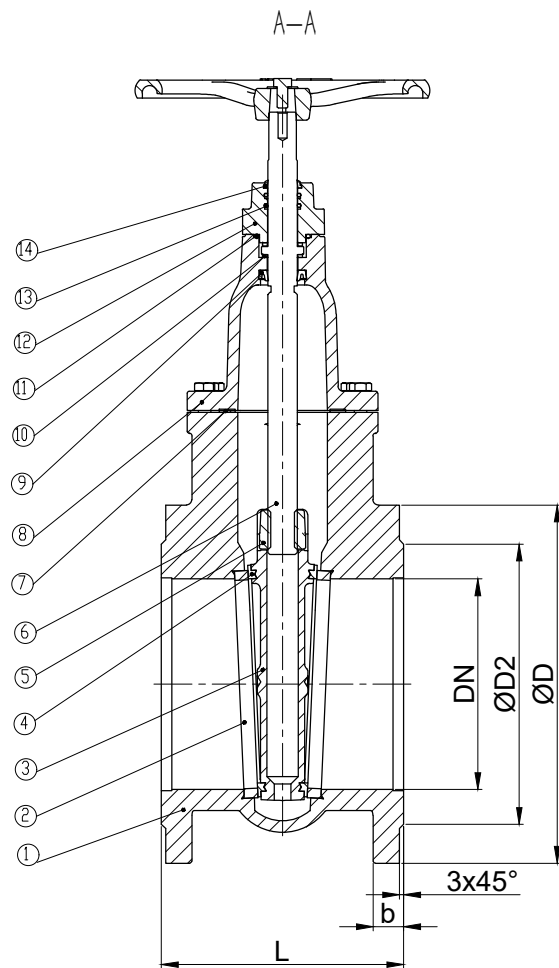


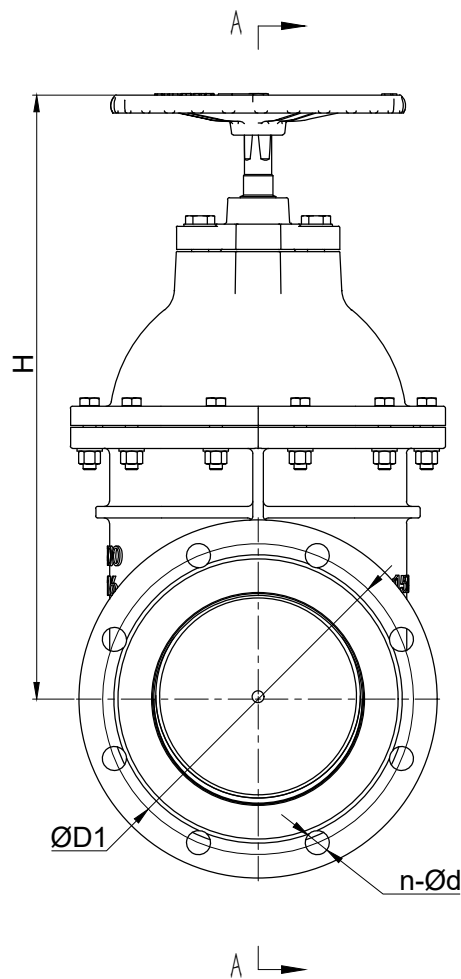

Pressure Test To ISO5208			
DN	Pressure Rating (PN)	Hydro-Test Pressure(MPa)	
		Body	Seat
40-300	10	1.5	1.1
	16	2.4	1.76

Design: DIN3352,
Face to face: DIN3352 F4
Flange drilling according to EN1092-2 PN10/16.

DN	DIN3202F4	ØD	EN1092-2 PN10			EN1092-2 PN16			b	H
	L		ØD1	ØD2	n-Ød	ØD1	ØD2	n-Ød		
40	140	150	110	84	4-19	110	84	4-19	18	248
50	150	165	125	99	4-19	125	99	4-19	20	242
65	170	185	145	118	4-19	145	118	4-19	20	261
80	180	200	160	132	8-19	160	132	8-19	22	318
100	190	220	180	156	8-19	180	156	8-19	24	353
125	200	250	210	184	8-19	210	184	8-19	26	445
150	210	285	240	211	8-23	240	211	8-23	26	480
200	230	340	295	266	8-23	295	266	12-23	30	590
250	250	405	350	319	12-23	355	319	12-28	32	650
300	270	460	400	370	12-23	410	370	12-28	32	730

Item	Part Name	Material	Item	Part Name	Material
1	Body	Cast iron	8	Bonnet	Cast iron
2	Seat Ring	Brass	9	V Seal	EPDM
3	Wedge	Cast iron	10	Washer	Nylon
4	Wedge Ring	Brass	11	O Seal	EPDM
5	Stem Nut	Brass	12	Gland	Cast iron
6	Stem	SS420	13	O Seal	EPDM
7	Bonnet Gasket	EPDM	14	Dust Guard	EPDM

DRN	wang	WEIGHT		MATERIAL	
CHK		SCALE		Gate Valve	
APP		DATE	07/19/2024		
				CZ0007	
				REV	20240719A